

ErgoPack 725 Air / 740 Air -

the height adjustable version of the proven ErgoPack 700 series



The maximum of flexibility and mobility in mobile pallet strapping systems




ErgoPack 725 Air / 740 Air

with:

- the patented, free floating Double-ChainLance,
- continuously variable height adjustment up to 550 mm,
- automatic measurement of pallet width,

to strap pallets on:

- conveyor lines,
- lifting tables,
- all kinds of trolleys.

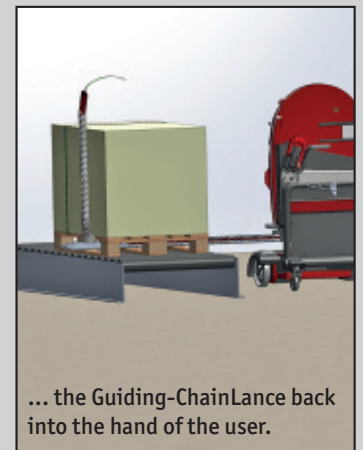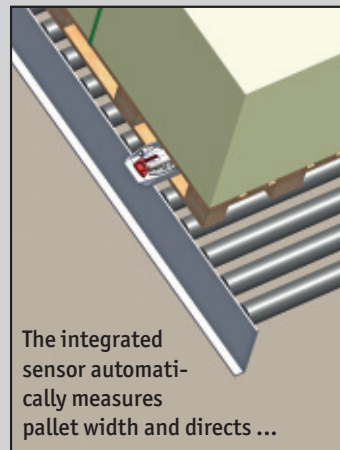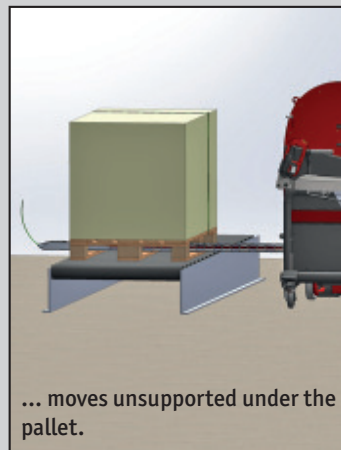

ErgoPack 725 Air / 740 Air

Technical details

Dimensions:	Width: 1130 mm
	Height: 1595 mm
	Depth: 1095 mm
	Weight: 267 kg

Ready-to-operate, incl. sealing head and spare battery pack, without strap

Maximum pallet dimensions: Width: 2,40 m*, Height: 2,00 m

Minimum clearance: 50 mm

Minimum width: 180 mm

Maximum vertical height between floor and pallet:

550 mm
electrical adjustment of height
5 storable height positions

Adjustment of pallet width:

a) manually by keyboard
b) automatic recognition of pallet width by ultrasonic sensor system

Display:

colour display, 4,3 inches
special membrane keyboard for operation with work gloves

Operating voltage:

24V DC

Charger:

special ErgoPack Dual 3-step charger (2x 12V)

Battery:

approx. 500 charges, charging time ca. 8 – 9 hours

Double-ChainLance:

Composed of:

- 1. Guiding-ChainLance:** High tensile, fibre-glass reinforced, rigid at frontward side, special self-lubricating ChainLance, maintenance free
- 2. Suspension-ChainLance:** Special ChainLance is rigid at front side and made of high tensile aluminium u-profiles. The joints of alloyed steel pins are maintenance free with self-lubricating sinter bronze bearing bushings

Sealing Head:

ErgoPack 725 Air:

strap width 12-16mm, up to 2.500N tension force

ErgoPack 740 Air:

strap width 16-19mm, up to 4.000N tension force

*Self-supporting up to 2,00 m, with first point of support between 1,00 m and 1,80 m up to 2,40 m